


Racks for continous mounting
 staight tooththing, Ange of pressure 20°, Milled teeth

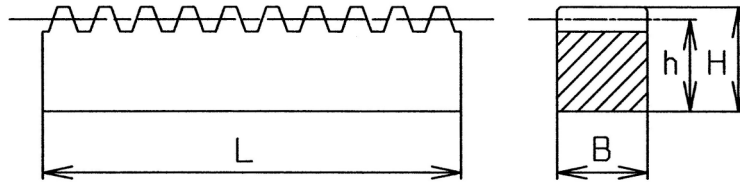

Material: C 45

Mod	Pitch	Teeth	Lenght	H	B	h	L +/- 0,3	kg / Stk. ≈
1	3,1416	159	499,51	15	15	14,0	449,1	0,82
1	3,1416	318	999,02	15	15	14,0	998,6	1,50
1	3,1416	636	1.998,05	15	15	14,0	1997,6	3,10
1,5	4,7124	106	499,51	17	17	15,5	449,1	1,00
1,5	4,7124	212	999,02	17	17	15,5	998,6	2,00
1,5	4,7124	424	1.998,05	17	17	15,5	1997,6	4,00
2	6,2832	80	502,65	20	20	18,0	502,1	1,40
2	6,2832	159	999,02	20	20	18,0	998,6	2,70
2	6,2832	318	1.998,05	20	20	18,0	1997,6	5,40
2,5	7,8540	64	502,65	25	25	22,5	502,1	2,10
2,5	7,8540	127	997,45	25	25	22,5	997,0	4,15
2,5	7,8540	255	2.002,77	25	25	22,5	2002,3	8,50
3	9,4248	53	499,51	30	30	27,0	498,9	3,10
3	9,4248	106	999,02	30	30	27,0	998,4	6,20
3	9,4248	212	1.998,05	30	30	27,0	1997,4	12,40
4	12,5664	40	502,65	25	25	21,0	502,0	1,80
4	12,5664	80	1.005,31	25	25	21,0	1004,7	3,60
4	12,5664	159	1.998,05	25	25	21,0	1997,4	7,10
4	12,5664	40	502,65	30	30	26,0	502,0	3,00
4	12,5664	80	1.005,31	30	30	26,0	1004,7	6,00
4	12,5664	159	1.998,05	30	30	26,0	1997,4	11,90
4	12,5664	40	502,65	40	40	36,0	502,0	5,50
4	12,5664	80	1.005,31	40	40	36,0	1004,7	11,10
4	12,5664	159	1.998,05	40	40	36,0	1997,4	22,00
5	15,7080	32	502,65	50	50	45,0	501,8	8,50
5	15,7080	64	1.005,31	50	50	45,0	1004,5	17,00
5	15,7080	128	2.010,31	50	50	45,0	2009,5	34,00
6	18,8496	27	508,93	60	60	54,0	508,0	12,40
6	18,8496	53	999,02	60	60	54,0	998,1	24,40
6	18,8496	106	1.998,05	60	60	54,0	1997,2	48,80