

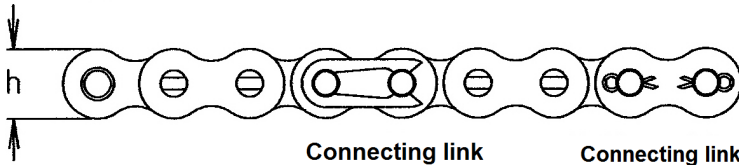


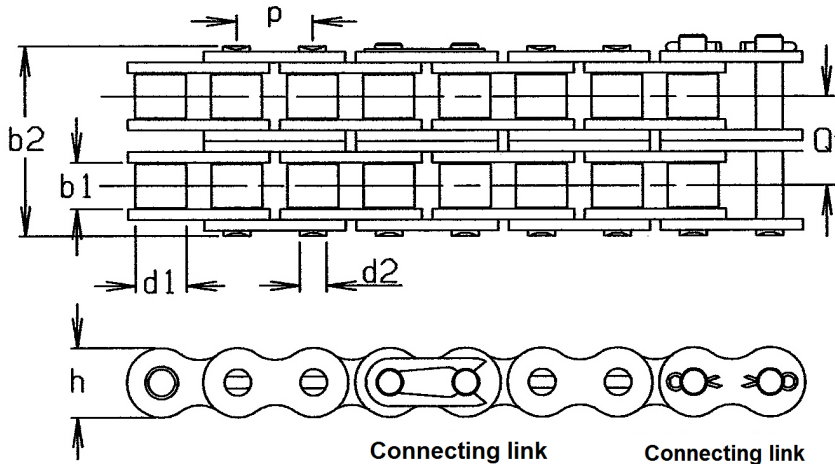


Simplex-Rollerchain

DIN 8187 / ISO 606



Connecting link with clip

Connecting link with cotter pin

cranked link with cotter pin

double cranked link

E

S







L

C

ISO No	Pitch	Width between inner plates	Roller diameter	Pin diameter	Pin length h b2 max. mm	Pin length h b3 max. mm	Plate depth h	Transverse pitch	Bearing area	Min. breaking strength	Weight	Connecting link		
06 B-1	9,525	5,72	6,35	3,28	12,50	16,00	8,20	-	28	8,9	0,40	X	X	X
08 B-1	12,70	7,75	8,51	4,45	16,60	18,50	11,80	-	50	17,8	0,69	X	X	X
10 B-1	15,875	9,65	10,16	5,08	19,00	21,80	13,70	-	67	22,2	0,85	X	X	X
12 B-1	19,05	11,68	12,07	5,72	22,30	25,10	16,10	-	88	28,9	1,17	X	X	X
16 B-1	25,40	17,02	15,88	8,28	35,10	42,50	20,80	-	205	60,0	2,66	X	X	X
20 B-1	31,75	19,56	19,05	10,19	40,50	48,00	25,40	-	292	95,0	3,72	X	X	
24 B-1	38,10	25,40	25,40	14,63	53,10	61,60	32,30	-	550	160,0	7,05	X	X	
28 B-1	44,45	30,99	27,94	15,90	63,30	72,80	37,00	-	735	200,0	8,96	X	X	
32 B-1	50,80	30,80	29,21	17,81	65,10	73,60	42,30	-	805	250,0	10,00	X	X	

Duplex-Rollerchain

DIN 8187 / ISO 606

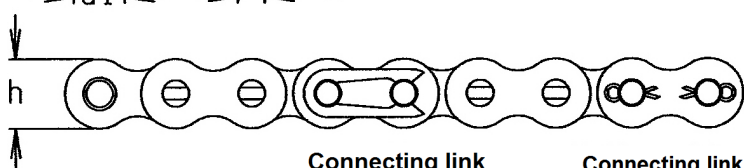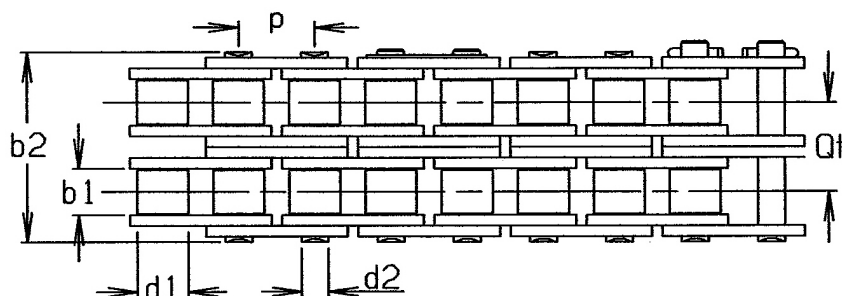

Connecting link with clip

Connecting link with cotter pin

cranked link with cotter pin

double cranked link

E

S

L

C

ISO No	Pitch	Width between inner plates	Roller diameter	Pin diameter	Pin length b2 max. mm	Pin length b3 max. mm	Plate depth	Trans verse pitch	Bearing area	Min. breaking strenght	Weight	Connecting link		
06 B-2	9,525	5,72	6,35	3,28	23,10	27,1	8,20	10,24	56	16,9	0,72	X	X	X
08 B-2	12,70	7,75	8,51	4,45	30,60	33,0	11,80	13,92	100	31,1	1,35	X	X	X
10 B-2	15,875	9,65	10,16	5,08	35,75	38,6	13,70	16,59	134	44,5	1,66	X	X	X
12 B-2	19,05	11,68	12,07	5,72	41,80	44,4	16,10	19,46	176	57,8	2,32	X	X	X
16 B-2	25,40	17,02	15,88	8,28	68,00	74,0	20,80	31,88	410	106,0	5,28	X	X	X
20 B-2	31,75	19,56	19,05	10,19	79,70	83,6	25,40	36,45	584	170,0	7,36	X	X	
24 B-2	38,10	25,40	25,4	14,63	101,80	112,7	33,40	48,36	1100	280,0	13,85	X	X	
28 B-2	44,45	27,94	15,90	63,30	124,70	132,7	37,00	59,56	1470	360,0	18,80	X	X	
32 B-2	50,80	29,21	17,81	65,10	126,00	132,4	42,30	58,55	1610	450,0	19,80	X	X	